

# pH Link & Dual Link



- + Fully integrated disinfection and dosing system
- + Automatic regulation
- + Accurate & easy reading (high quality glass sensor in a POD)

**2** YEAR  
WARRANTY



## ACCESSORIES INCLUDED IN THE PACK

|   |   |   |  |   |   |   |
|---|---|---|--|---|---|---|
|  |  |  |  |  |  |  |
| pH Sensor   | ORP sensor  | pH 4 and pH 7 buffer solutions x3   | 470 mV ORP buffer solutions x3   | 22 mm hole saw  | Plumbing kit  | POD Kit   |

## FOR WHICH POOL?

| Model                                       | pH Link            | Dual Link                                   |
|---|--------------------|---|
| Volume of treated water (temperate climate) | 160 m <sup>3</sup> | Depending on the chlorinator's output power |
| Dosage                                      | Acid               | Acid  |

## DESCRIPTION

| Model           | pH Link   | Dual Link |
|-----------------|---|-----------|
| Standard Model  | WW000176  | WW000177  |
| User interface  | Device's interface (4-line, backlit LCD screen)                                   |           |
| Calibration     | Semi-automatic at 2 points pH 4 and pH 7 & ORP 470 mV (buffer solutions included) |           |
| Setpoints       | Factory setting: pH = 7,2 / ORP = 700 mV  |           |
| Sensor position | Vertical, on the POD (provided)   |           |
| Safety          | Overdosing safety, low measures, unplugged sensor, broken sensor (pH Link)        |           |

## TECHNICAL SPECIFICATIONS

| Model                                      | pH Link   | Dual Link     |
|--|---|---------------|
| Sensor type pH or ORP                      | Combined sensor, simple-junction and simple-porous, Ø12 mm glass body |               |
| Reading scale                              | 0,0 -12,0 pH  | 100 - 1000 mV |
| Reading accuracy                           | 0,1 pH  | 10 mV         |
| Sensor Tolerances                          | 0-60 °C, water speed ≤ 2 m/s  |               |
| Maximum counter pressure (injection point) | 1,5 bar   |               |
| Peristaltic pH pump flow                   | 1,2 L/h   |               |
| Cell size (L x w x h)                      | 30,5 x 18,1 x 11,5 cm   |               |


\* Excluding consumable parts that have 1 year warranty (ORP sensor, buffer solution, peristaltic tube, one-way valve)

## INSTALLATION


- Connect the unit directly to the chlorinator's control unit.
- The distance between the module and the sensor cell is 1,5m (3 m extension cable is optional).
- The POD MUST be installed so that the sensor(s) is/are vertical, to ensure accurate measurement.

pH Link & Dual Link Modules installation diagram:

Kit POD on line:

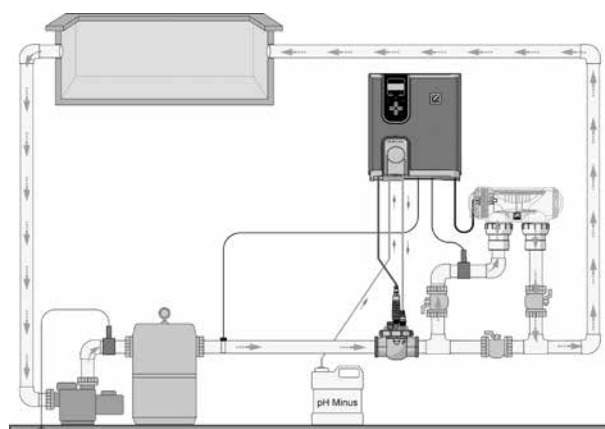

POD Kit in by-pass:

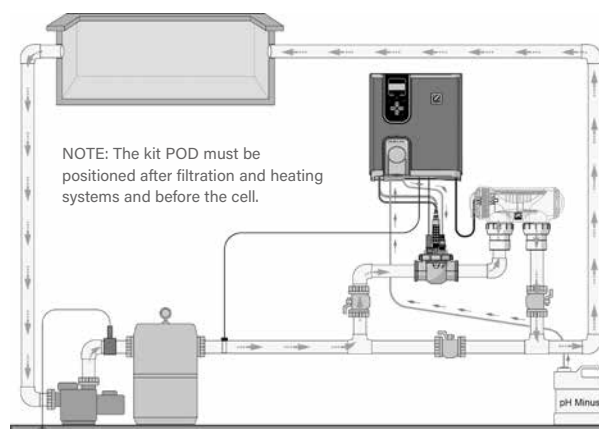

## OPTIONAL ACCESSORIES

| Intake pipe | pH 4 and pH 7 buffer solutions (x6 + x6) | 470 mV ORP buffer solutions (x6) | Winterizing cap | 3m BNC cable extension | Earthing anode |
|-------------|--|----------------------------------|-----------------|------------------------|----------------|
| R0808000    | R0824400                                 | R0824500                         | R0770100        | R0635800               | R0673800       |